Blueseal 16

Raccordi a compressione

Compression fittings
Raccords à compression
Accessorios compresiòn



Scheda tecnica

Technical features | Fiche technique | Ficha técnica

CODE
B 125

Gomito a 90° filettato femmina	90° female elbow	Coude à 90° taraudé	Codo a 90° hembra
Ghiera **[PP]**	Nut **[PP]**	Ecrou **[PP]**	Tuerca **[PP]**
Anello di aggraffaggio **[POM]**	Grip ring **[POM]**	Bague d'agrafage **[POM]**	Cono de fijiación **[POM]**
Anello Blueseal **[PP]**	Spacer ring Blueseal **[PP]**	Douille de poussée **[PP]**	Anillo prensa juntal **[PP]**
Guarnizione Blueseal **[NBR]**	Gasket Blueseal **[NBR]**	Joint Blueseal **[NBR]**	Junta Blueseal **[NBR]**
Corpo **[PP]**	Body **[PP]**	Corp **[PP]**	Cuerpo **[PP]**


SAB
cherish your water
SYSTEM GROUP

Gomito a 90° filettato femmina


90° female elbow
Coude à 90° taraudé
Codo a 90° hembra



Female threads



ISO 7/1 Parallel

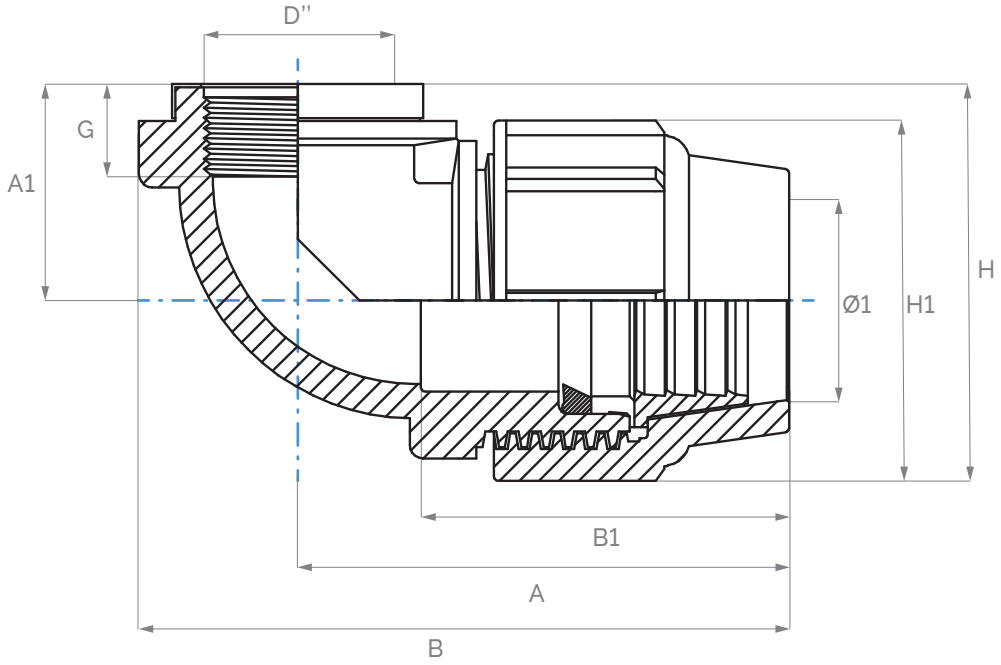

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø1 x D''	bar	B	H	B1	H1	G	A	A1	gr
B12501600BA	16 x ½''	16	73	54	46	49	18	57,5	29,5	32
B12501600CA	16 x ¾''	16	75	59	46	49	19	56,5	34,5	36
B12502000BA	20 x ½''	16	89	60	50	47	14	69,0	36,5	50
B12502000CA	20 x ¾''	16	89	67	50	47	18	68,5	43,5	55
B12502500BA	25 x ½''	16	95	66	53	54	15	75,0	39,0	64
B12502500CA	25 x ¾''	16	95	66	53	54	19	72,5	39,0	66
B12502500DA	25 x 1''	16	95	74	53	54	20	72,5	47,0	74
B12503200BA	32 x ½''	16	106	76	63	65	15	87,0	43,5	100
B12503200CA	32 x ¾''	16	109	78	63	65	19	86,1	45,5	105
B12503200DA	32 x 1''	16	113	80	63	65	19	85,5	47,5	113
B12503200EA	32 x 1''¼	16	113	82	63	65	20	85,0	49,5	140
B12504000DA	40 x 1''	16	140	101	72	83	22	111,0	59,5	198
B12504000EA	40 x 1''¼	16	145	103	74	83	23	109,0	61,5	223

- **Anello di rinforzo (inox AISI 430) da 1" ½ a 4"** | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"
- **Ø16 disponibile con guarnizione o-ring** | Ø16 available with o-ring gasket


Normative | Standards | Normes | Normas
UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)

Gomito a 90° filettato femmina


90° female elbow
Coude à 90° taraudé
Codo a 90° hembra



Female threads



ISO 7/1 Parallel

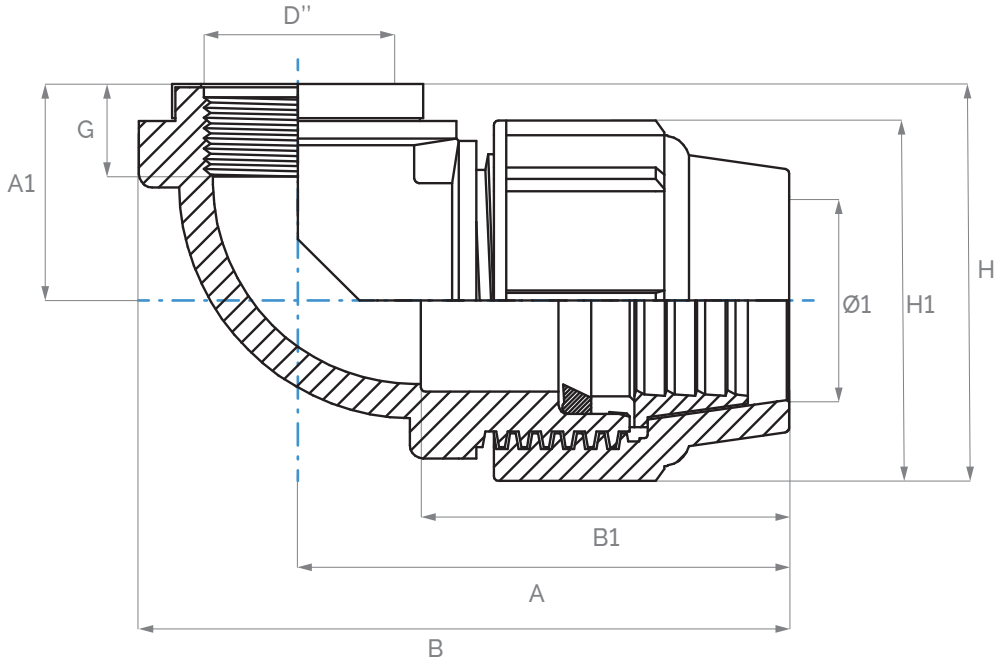

Code	Size (mm)	PN	Dimensions (mm)							Weight
Code	Ø1 x D''	bar	B	H	B1	H1	G	A	A1	gr
B12504000FA	40 x 1''½	16	140	106	72	83	24	104,0	64,5	250
B12505000EA	50 x 1''¼	16	156	119	85	97	24	124,0	70,5	300
B12505000FA	50 x 1''½	16	163	118	85	97	25	124,0	69,5	334
B12505000GA	50 x 2''	16	159	121	85	97	25	117,5	72,5	377
B12506300FA	63 x 1''½	16	193	135	106	114	25	153,5	78,0	524
B12506300GA	63 x 2''	16	198	138	106	114	28	153,0	81,0	550
B12506300IA	63 x 2''½	10	193	143	106	114	29	144,0	86,0	648
B12507500IA	75 x 2''½	10	225	146	120	133	29	168,0	79,5	855
B12507500LA	75 x 3''	10	225	170	120	133	33	167,5	103,5	940
B12509000LA	90 x 3''	10	264	178	145	154	33	198,0	101,0	1337
B12509000MA	90 x 4''	10	263	206	145	154	38	196,0	129,0	1407
B12511000MA	110 x 4''	10	333	218	184	188	38	256,0	124,0	2110

• **Anello di rinforzo (inox AISI 430) da 1" ½ a 4"** | Reinforcing ring (stainless steel AISI 430) from 1" ½ to 4"
• **Ø16 disponibile con guarnizione o-ring** | Ø16 available with o-ring gasket

Normative | Standards | Normes | Normas
UNI9561 | AS/NZS4129 | BRL-K 17105 | DVGW GW 335-B3 | ISO17885 | UNI EN 10226-1 (ISO 7/1)