




# SLIM

## Verticale

20/30/45/60/80

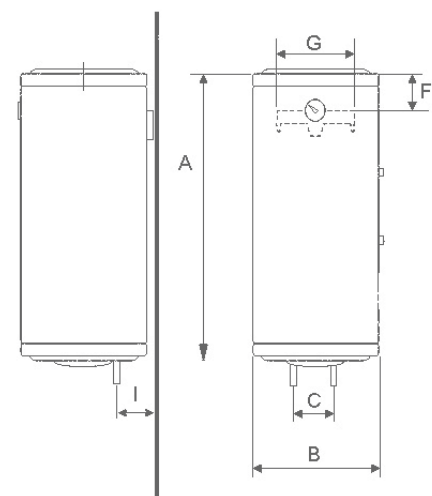

| Modello | A<br>mm | B<br>mm | C/E<br>mm | F<br>mm | G<br>mm | I<br>mm |
|---------|---------|---------|-----------|---------|---------|---------|
| SLIM 20 | 350     | 370     | 100       | 70      | 250     | 90      |
| SLIM 30 | 450     | 370     | 100       | 70      | 250     | 90      |
| SLIM 45 | 700     | 370     | 100       | 120     | 250     | 90      |
| SLIM 60 | 850     | 370     | 100       | 120     | 250     | 90      |
| SLIM 80 | 1030    | 370     | 100       | 120     | 250     | 90      |

**+** *IL NOSTRO OBIETTIVO:  
SPACE SAVING*

| Modello | Dispersione Termica<br>65° (Kwh/24h) | Potenza<br>W | Voltaggio<br>V | Tempo di<br>riscal. Δt 50° | Temp. Max<br>Esercizio C° | Pressione Max<br>Esercizio (bar) | Protezione<br>Umidità | Classe<br>Isol. | Profilo | Classe<br>Energ. |
|---------|--------------------------------------|--------------|----------------|----------------------------|---------------------------|----------------------------------|-----------------------|-----------------|---------|------------------|
| SLIM 20 | 0,56                                 | 1200         | 230            | 64'                        | 75                        | 8                                | IPX4                  | I               | S       | C                |
| SLIM 30 | 0,69                                 | 1200         | 230            | 75'                        | 75                        | 8                                | IPX4                  | I               | S       | C                |
| SLIM 45 | 0,72                                 | 1200         | 230            | 110'                       | 75                        | 8                                | IPX4                  | I               | M       | C                |
| SLIM 60 | 0,78                                 | 1200         | 230            | 150'                       | 75                        | 8                                | IPX4                  | I               | M       | C                |
| SLIM 80 | 0,79                                 | 1200         | 230            | 250'                       | 75                        | 8                                | IPX4                  | I               | M       | C                |